X2-R9(X2-R19) Series Rocker Switches



SPECIFICATION

Electrical Rating : 12A 125VAC 6A 250VAC (UL) 4(1)A 250VAC (VDE) 16A 250VAC/21A 125VAC(UL) 16(6)A 250VAC(VDE) R91,R9D Mechanical life: Over 30000 cycles Electrical life: Over 10000 cycles Contact resistance: $<20m \Omega$ Insulation resistance: >1000M Ω High voltage resistance: >1500VAC 1 min. Ambient temperature: Terminal side -20 to +85°C Actuating side- 20 to +55°C Atmospheric humidity: Max.85% Actuating force: 4 to 8N(depends on different switch function) Flammability: UL94V-2 Storage temperature: -30 to +80°C Max Temperature rise at the terminal: Max 30°C (UL1054) Solder ability of terminal: Max 350°C 3s


MATERIALS

Housing: PA 66 Rocker: PC & PA66 Contact: Silver alloy Terminal: Brass silver plated Lamp: Neon lamp, Tungsten lamp, LED Movable arm: Beryllium copper



X2-R9 K 2 Series Switch Rating


HOW TO ORDER

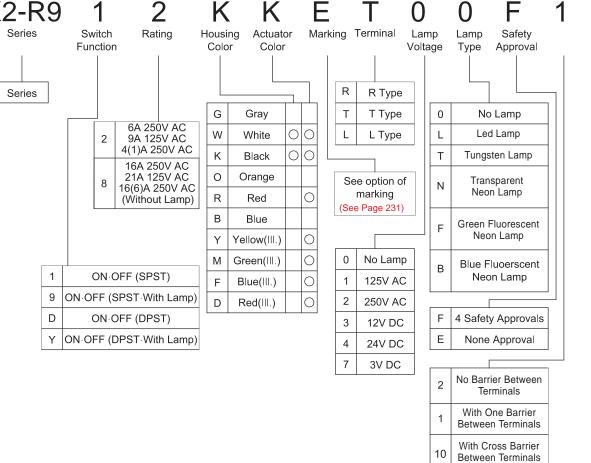


X2-R9(X2-R19) Series Rocker Switches

OPTIONS OF SWITCH FUNCTION / DIMENSION

Item	Poles	Rocker Position		
Number	& Throws			
X2-R91	SPST	ON	NONE	OFF
X2-R99	SPST (WITH LAMP)	ON	NONE	OFF
X2-R9D	DPST	ON	NONE	OFF
X2-R9Y	DPST (WITH LAMP)	ON	NONE	OFF
X2-R9I	Indicator			
X2-R9B	The block sealed on the panel			

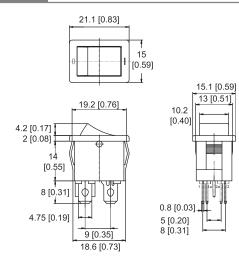

PANEL CUT OUT



Z	Y	Х
0.7~1.25	12.8~12.9	19.2~19.3
1.25~2.0	12.8~12.9	19.3~19.4
2.0~3.0	12.8~12.9	19.5~19.6

CIRCUITS FOR SWITCH WITH LAMP

For circuit of 250VAC, 125VAC with neon lamp For circuit of 24 VDC, 12 VDC, 6 VDC, 3 VDC with lamp For circuit of 48 with LED



1a

0

NEON LAMP

RESISTOR



1a

7

250VAC OR 125VAC


2


0

NEON LAMP

O_____

CIRCUIT FOR 48VDC with LED






7

250VAC OR 125VAC

9

LOAD


RESISTOR





TERMINAL TYPE

Т Туре




Quick Connect Tab


R Type

LOAD

LOAD



Right Angle PC Through Hole Terminal L Type



Left Angie PC Through Hole Terminal