

## SPECIFICATIONS


### MECHANICAL

**Mechanical Life:** 1000 operation cycles per switch.  
**Operation Force:** 500gf max.  
**Operation Temp:** -40°C to 85°C

### ELECTRICAL

**Electrical Life:** 1000 operation cycles per switch 24VDC,25mA  
**Non-Switching Rating:** 100mA,50VDC  
**Contact Resistance:** 100mΩ max.at initial.  
**Insulation Resistance:** 100MΩ min (at 500VDC)  
**Dielectric Strength:** 300VAC/1 minute  
**Capacitance:** 5pf max.


## HOW TO ORDER

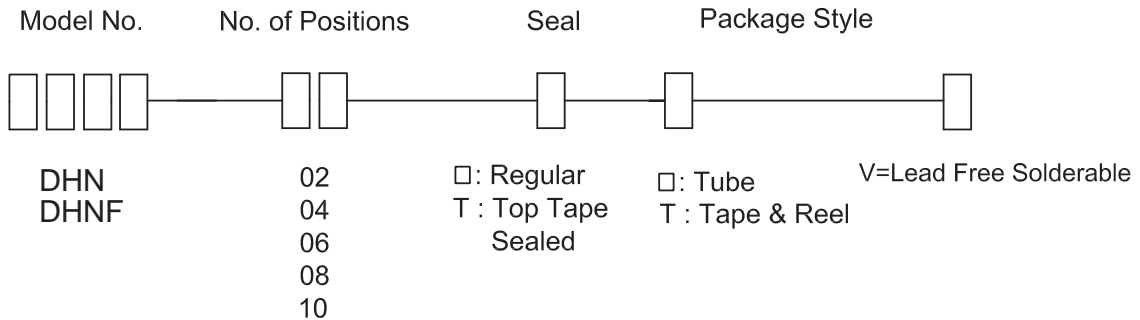

## TERMINATION / NUMBER OF POSITIONS

### DHN

DHN -10	10	13.93[.548]
DHN - 8	8	11.39[.448]
DHN - 6	6	8.85[.348]
DHN - 4	4	6.31[.248]
DHN - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

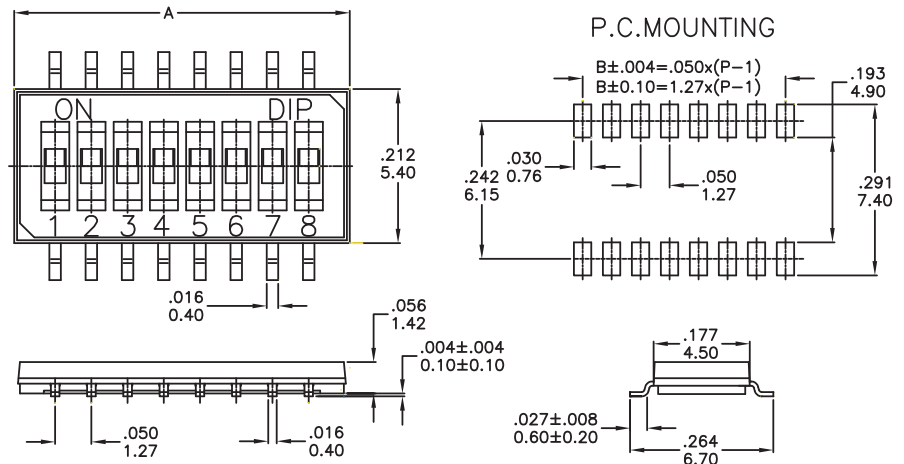

### DHNF

DHNF -10	10	13.93[.548]
DHNF - 8	8	11.39[.448]
DHNF - 6	6	8.85[.348]
DHNF - 4	4	6.31[.248]
DHNF - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

