

12V Flexiprint

RGB (PLCC6)

Specifications




Voltage	12V
Current	3x1A
Wattage	14.4W/m (3x4.8W/m)
Number of LED's	150pcs
Length of Stripe	2.5m
Operating Temperature	-25°~+60°C
Storage Temperature	-40°~+80°C
Viewing Angle	110°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
Cuttable every ~50mm

Electrical and Optical Characteristics (Ta=25°C)

Part Number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP-F02B-250	 red	624nm	120	D
	 green	518nm	230	B
	 blue	471nm	55	E
				Total: E

Dimensions

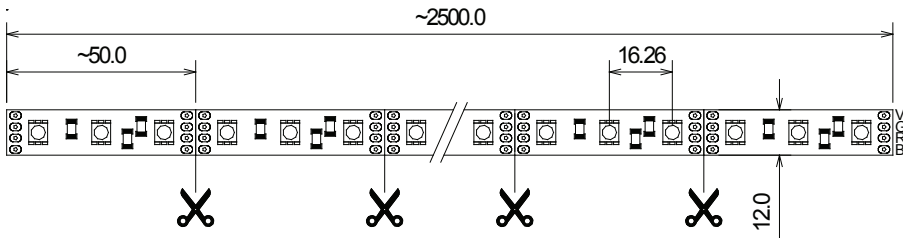

Sloan_03_GK_LED-Modules_15B

Thickness: 2.1 mm

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**