

12V Flexiprint

Standard bright (PLCC2) slim version

Specifications

Voltage	12V
Current	2A
Wattage	4.8W/m
Number of LED's	300pcs
Length of stripe	5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
cuttable every ~49.6mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP5-B01B-500	blue	472nm	110	E
FP5-G01B-500	green	525nm	450	C
FP5-H01B-500	warm-white	2600-2800°K	2100	A
FP5-N01B-500	warm-white	2800-3100°K	2100	A
FP5-R01B-500	red	639nm	240	E
FP5-S01B-500	natural-white	3800-5000°K	2400	A+
FP5-W01B-500	white	5500-6700°K	2400	A+
FP5-Y01B-500	yellow	590nm	200	E

Dimensions

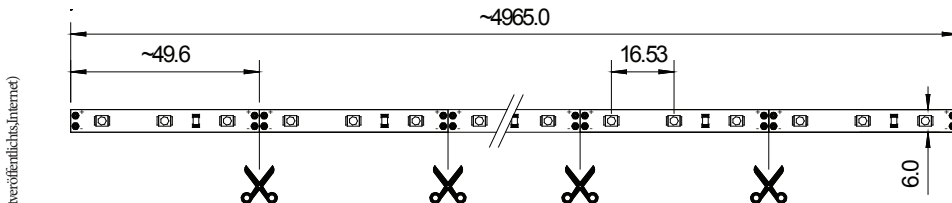

Sloan_03_CK_LED-Module_18A (derzeitverfuehrlich.inernet)

Thickness: 2.4 mm

1. All dimensions are in millimetres
2. Tolerance is ± 0.50 mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**