

12V Flexiprint Silicone IP67

RGB (PLCC6)

Specifications

| | |
|-----------------------|--------------------|
| Voltage | 12V |
| Current | 3x1A |
| Wattage | 14.4W/m (3x4.8W/m) |
| Number of LED's | 150pcs |
| Length of Stripe | 2.5m |
| Operating Temperature | -25°~+60°C |
| Storage Temperature | -40°~+80°C |
| Viewing Angle | 110° |
| CE/RoHS compliant | |




Benefits

Adhesive tape on backside
IP67 Protection

Electrical and Optical Characteristics (Ta=25°C)

| Part Number | Colour | Wavelength / CCT | Intensity lm (typ.) | EEC |
|--------------|--|------------------|---------------------|----------|
| FPS-F02B-250 | ● red | 624nm | 120 | D |
| | ● green | 518nm | 230 | B |
| | ● blue | 471nm | 55 | E |
| | | | | Total: E |

Dimensions

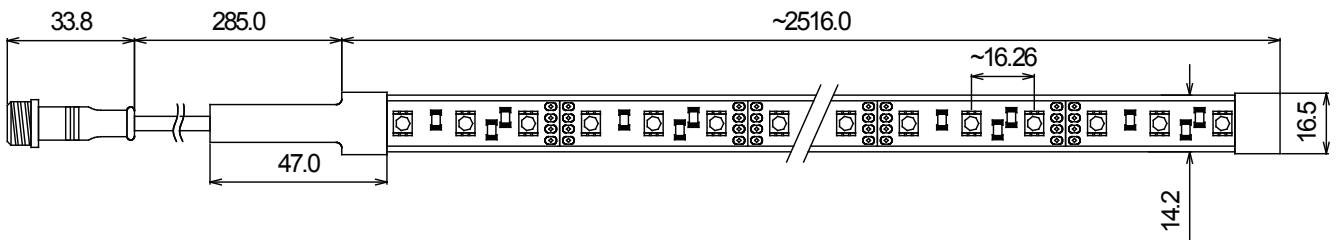

Thickness: 5.9 mm
Thickness endings: 6.8 mm
250 mm 4pol Adaptercable included

not designed for submersion or outdoor usage
IP protection is no longer applicable after cutting

1. All dimensions are in millimetres
2. Tolerance is ± 0.25 mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**