


## 24V Flexiprint

High bright (PLCC6)

### Specifications



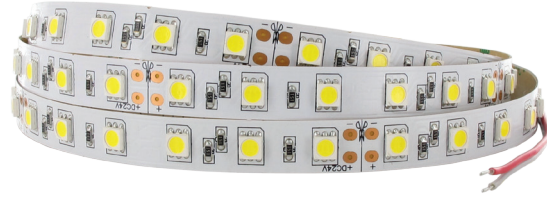





Voltage	24V
Current	3A
Wattage	14.4W/m
Number of LED's	300pcs
Length of stripe	5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	




### Benefits

Adhesive tape on backside  
cuttable every ~100mm

### Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP3-B02D-500	 blue	472nm	290	E
FP3-G02D-500	 green	525nm	1200	D
FP3-H02D-500	 warm-white	2600-2800°K	5250	A
FP3-N02D-500	 warm-white	2800-3100°K	5250	A
FP3-R02D-500	 red	639nm	630	E
FP3-S02D-500	 natural-white	3800-5000°K	6000	A
FP3-W02D-500	 white	5500-6700°K	6000	A
FP3-Y02D-500	 yellow	590nm	540	E

### Dimensions

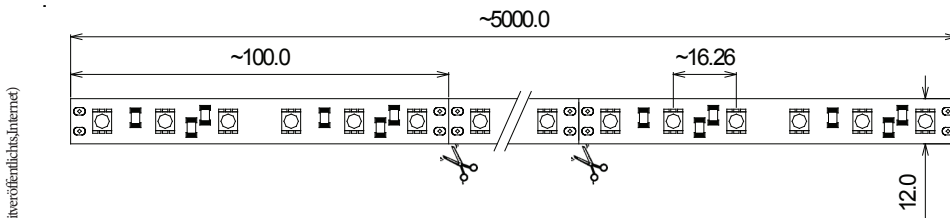

Sloan\_03\_CK\_LED-Module\_18A (derzeitverfuehrlich.sloane.ch)

Thickness: 2.1 mm

1. All dimensions are in millimetres
2. Tolerance is  $\pm 0.50$ mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**